


COUPLING L

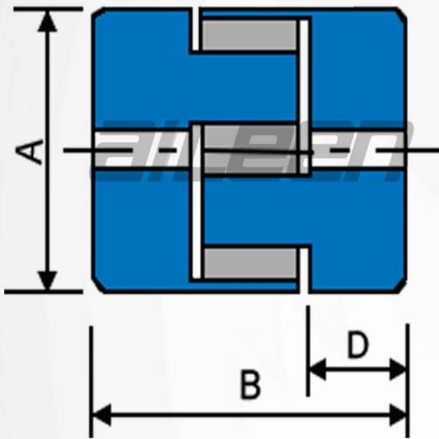

Model	bore		rpm	D	L	L1	L2	kg
	Min	Max						
L-035	4	8	6000	16.1	20.15	6.68	6.77	0.04
L-050	7	16	4500	27.6	42.55	15.64	11.25	0.14
L-070	7	20	3600	34.28	49.92	19.3	11.3	0.27
L-075	9	26	3600	44.6	52.88	20.56	11.74	0.45
L-090	11	28	3000	53.58	53.22	20.7	11.8	0.6
L-095	11	28	3000	53.58	62.36	25.22	11.9	0.7
L-099	13	36	3000	64.55	76.47	29.72	17.01	1.4
L-100	13	36	3000	64.55	86.47	34.72	17.01	1.5
L-110	13	38	2500	84.28	106.32	43.08	20.14	3
L-150	17	46	2500	95.28	112.95	44.6	23.73	4