


COUPLING FCL

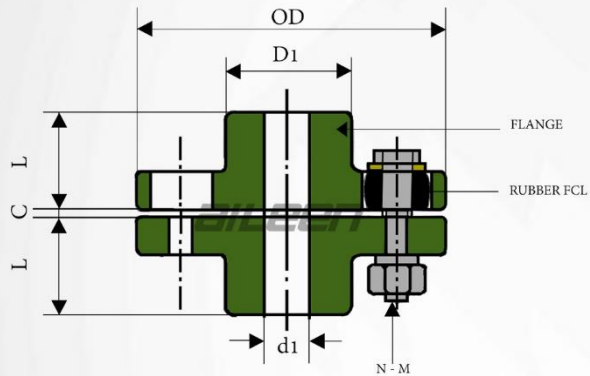

Type	OD	D1	d1	L	C	N-M	Pin No.	Max Torque	Max speed	Weight
								N.m	r/min	kg.
FCL 90	90	35.5	11	28	3	4-m8x50	1	6	4000	1.7
FCL 100	100	40	11	35.5	3	4-m10x56	2	12	4000	2.5
FCL 112	112	45	13	40	3	4-m10x56	2	18	4000	3
FCL 125	125	56	13	45	3	4-m12x64	3	27	4000	4
FCL 140	140	71	13	50	3	6-m12x64	3	55	4000	5.6
FCL 160	160	80	15	56	3	8-m12x64	3	118	4000	7.8
FCL 180	180	90	15	63	3	8-m12x64	3	160	3500	10.5
FCL 200	200	100	21	71	4	8-m20x85	4	250	3200	16.2
FCL 224	224	112	21	80	4	8-m20x85	4	400	2850	21.6
FCL 250	250	125	25	90	4	8-m24x100	5	616	2550	31.8
FCL 280	280	140	34	100	4	8-m24x116	6	980	2300	44
FCL 315	315	160	41	112	4	10-m24x116	6	1568	2050	58
FCL 355	355	180	60	125	5	8-m30x150	8	2460	1800	89.5
FCL 400	400	200	60	125	5	10-m30x150	8	3920	1600	113
FCL 450	450	224	65	140	5	12-m30x150	8	6180	1400	145
FCL 560	560	250	85	160	5	14-m30x150	8	9800	1150	229
FCL 630	630	280	95	180	5	18-m30x150	8	15680	1000	296